

BALT5-1300ACTD: T5 Fluorescent Emergency Ballast with AC Output & Time Delay



Project:	
Type:	
Catalog #:	



Including
Low-Voltage
LED Combo Switch

- Works in conjunction with an AC ballast to convert new or existing fluorescent fixtures into unobtrusive emergency lighting
- Maintains illumination of one or two lamps in the emergency mode for a minimum of 90 minutes

Features

- Provides a minimum of 90 minutes of emergency illumination
- AC Output ensures compatibility with newer lamp technologies and helps prolong lamp life
- Time delay enhancement to overcome end-of-life circuit protection
- Can be installed inside, on top or in remote* of the fixture
- Can be used in both switched and unswitched fixtures
- UL 924 Listed for damp location
- UL listed for Retrofit/Field Installation
- Life safety NFPA 101
- NEC/OSHA
- Meets most state and local codes

Electrical

- Dual Voltage Input 120V/277 VAC, 60Hz
- Solid-state charger circuit
- Test Switch/Power Indicator light
- Temperature Rating (Ambient): 0°C to 50°C [32°F to 122°F]
- Maintenance-free, long life, Sealed Nickel Cadmium Battery
- Maximum battery recharge time: 24 hours
- AC Output in emergency mode

Housing

- Low-profile galvanized steel housings

Warranty


- All Best Lighting emergency ballasts are warranted for a full five (5) years against defects in material and workmanship (lamps excluded)

Illumination


- Operates one or two lamps in the emergency mode for a minimum of 90 minutes – please refer to back of page for more information
- Provides a maximum initial lumen output of 1300 Lumen

Lamp Compatibility

- Compatible with 1-lamp, 2-lamp, 3-lamp and 4-lamp fixtures with many ballast types including standard, rapid-start, slimline, instant-start, energy-saving, dimming and electronic AC ballast – consult factory regarding specific applications
- Compatible with many different lamp types –refer to back of page or contact customer service for more information



Dimensions

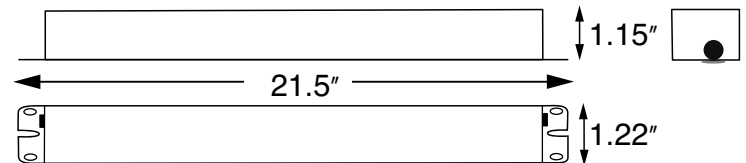

ORDERING INFORMATION

Model

BALT5-1300ACTD

Model

* Conditions apply for remote mounting. Check with the factory for more information.

Lamp Compatibility Data: T5 Fluorescent Emergency Ballast with AC Output & Time Delay

BALLAST MODEL NO.		No. of Lamps Operated	BALT5-500ACTD	BALT5-800ACTD	BALT5-1300ACTD
Lumen Output		1L: One Lamp 2L: One or Two Lamps	500	800	1300
Linear Fluorescent Lamps	T5 (W)	1L	14 - 28	14 - 28	14 - 28
		2L	8	8	8
	T5HO (W)	1L	-	-	39, 54
		2L	-	-	-
	T8 (W)	1L	17 - 32	17 - 40	17 - 40
		2L	-	-	-
	T10 (W)	1L	-	17 - 40	17 - 40
		2L	-	-	-
	T12 (W)	1L	20	17 - 40	17 - 40
		2L	-	-	-
Compact Fluorescent Lamps	4-Pin CFL (W)	1L	-	13 - 26	26 - 42
		2L	13 - 26	-	13, 18
	4-Pin Long CFL (W)	1L	-	18 - 50	36 - 50
		2L	-	-	18 - 24
	2-PinCFL (W)	1L	-	-	-
Special Fluorescent Lamps	T9 Circline CFL (W)	1L	-	20 - 40	20 - 40
		2L	-	-	-
	U-Bend (W) T8	1L	-	-	32, 40
		2L	-	-	-
	T12	1L	-	-	34, 40
		2L	-	-	-

* Contact customer service for other lamp applications.