

LED	25,000 Hours average rated life, 12Volts
------------	--

Applications:


Ideal for spot and flood MR16 applications. LED lamps are the best possible lighting conversion solution when considering energy and maintenance savings.

- + Track Lights
- + Recessed Downlights
- + Display Lights
- + Elevator Lights



Features and Benefits

- **Energy Efficient:** Up to 80% less energy than halogen alternatives
- **Long life:** 25,000 hours (lasts at least 12 times longer than alternative)
- **Very Durable:** Solid state lighting technology significantly reduces lighting service & maintenance due to robust lighting design.
- **Very low heat generation** – excellent for sensitive display lighting.
- **Excellent Color consistency and high color rendering (CRI).**


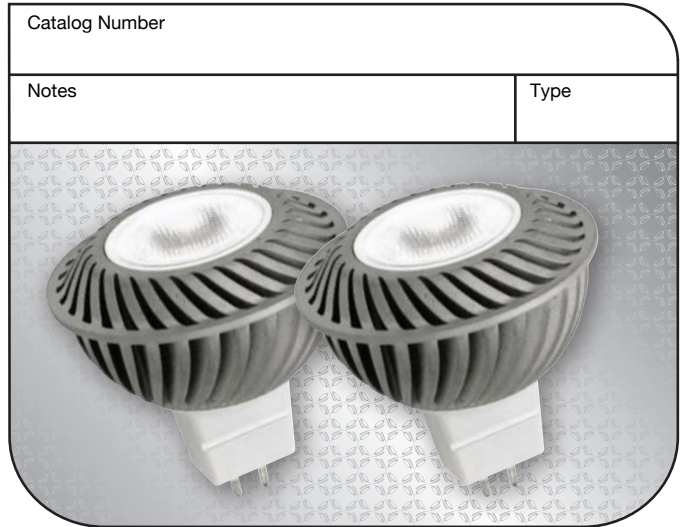


Specifications

Input Line Voltage:	12 VAC/DC
Input Power	4 W
Input Line Frequency	50/60HZ
Lamp Life (Rated)	25,000 hrs
Minimum Starting Temp	-20°C
Maximum Operating Temp	40°C
CCT	3000K
CRI	85



WARNINGS AND CAUTIONS
 Use only in dry locations
 12V MR16 should only be used with Class 2 circuits.
 Turn off power before changing lamp.
 Not for use with Exit and Emergency fixtures
 Not for use with dimmers
 Test lamps before installation. Lamps may not be compatible with some electronic transformers.

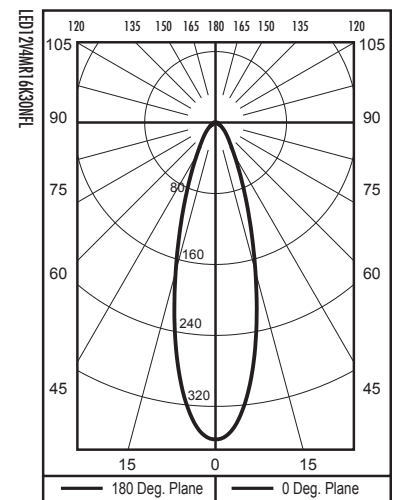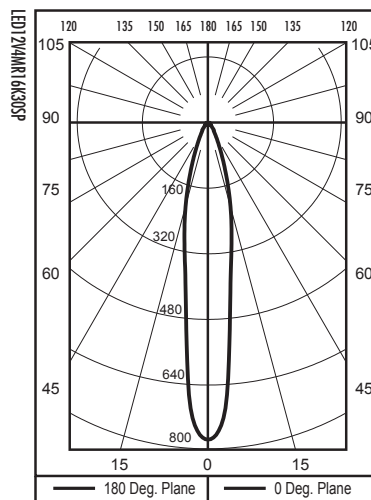

Warranties and Certifications:	Item #	Description	Wattage	Voltage	Lumens	CBCP	Base	M.O.L. (inches)	Diameter (inches)
3 YEAR WARRANTY	LED12V4MR16K30SP	4W 12V MR16 - Spot (15°)	4	12VAC/DC	160	760	GU5.3	2	2
	LED12V4MR16K30NFL	4W 12V MR16 - Narrow Flood (30°)	4	12VAC/DC	160	360	GU5.3	2	2